


Calico White Fine Vein

Sintered stone | Marble Look | Matte



SLAB APPEARANCE

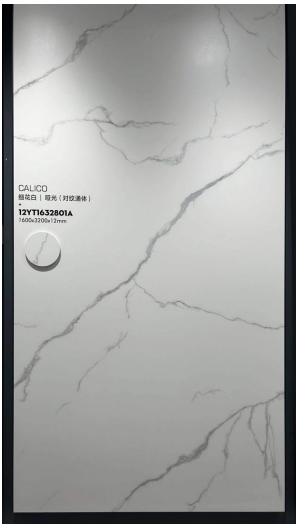

PRODUCT IMAGE

01 Product specification

Property	Specification
Material	Sintered stone
Look / colour	Marble Look / Clean white and soft smoke gray
Pattern	Minimal open linear movement
Surface finish	Matte
Surface detail	Sparse slender smoke-gray veins with light branching
Body / faces	Full Body / Bookmatched
Applications	Minimalist kitchens; Spa bathrooms; Feature walls; Vanity cladding; Cabinetry; Furniture panels; Selected interior floors
Supply	Full slabs; cut-to-size service available on request.

Review a physical sample and the selected slab layout to confirm colour, finish, pattern and edge appearance before fabrication.

Dimensions, weight & packing

Available size and thickness combinations for Calico White Fine Vein.

Size (mm)	Thickness (mm)	Area (m ² /slab)	Net (kg/m ²)	Net (kg/slab)
1600 × 3200	6	5.12	12.84	65.7
1600 × 3200	9	5.12	18.55	95.0
1600 × 3200	12	5.12	26.17	134.0
1600 × 3200	15	5.12	32.81	168.0
1200 × 2700	6	3.24	12.84	41.6
1200 × 2700	9	3.24	19.44	63.0
1200 × 2700	12	3.24	25.62	83.0
1200 × 2700	15	3.24	32.10	104.0
1200 × 2400	6	2.88	12.84	37.0
1200 × 2400	9	2.88	19.10	55.0
1200 × 2400	12	2.88	25.68	74.0
1200 × 2400	15	2.88	32.10	92.4
900 × 2700	6	2.43	12.84	31.2
900 × 2700	9	2.43	18.93	46.0
900 × 2700	12	2.43	25.68	62.4
900 × 2700	15	2.43	32.10	78.0
1200 × 2800	6	3.36	13.39	45.0

Reference net weights exclude packing. Calculated values are approximate; confirm actual batch weights and the final packing list with your order.

02 Packing reference

1600 × 3200 mm slabs | No.11 steel A-frame
Frame: 3300 × 770 × 1940 mm | Tare: 95 kg

Thickness	Slabs / frame	Area / frame	Approx. gross
9 mm	38	194.56 m ²	3,700 kg
12 mm	26	133.12 m ²	3,600 kg
15 mm	22	112.64 m ²	3,800 kg

Frame quantities are format references. Other sizes, thicknesses and mixed loads require a confirmed packing plan.

From selection to installation

Practical guidance for specifying and using Calico White Fine Vein.

03 Selection and fabrication

Stage	Guidance
Select and approve	Review the physical sample, full-slab pattern and proposed edge profile. Confirm finish, thickness and dimensions before cutting.
Plan the layout	Agree slab orientation, joints and cutouts with your fabricator. For bookmatched or continuous layouts, confirm the required face sequence and slab quantities.
Fabricate and install	Use a qualified sintered-stone fabricator. Coordinate substrate, support, fixing, cutouts and reinforcement with the installer; follow the equipment and installation system instructions.
Match the application	For wet floors, exterior cladding or load-bearing details, confirm the performance and installation requirements for the specific finish, thickness and project.

04 Handling and routine care

Item	Guidance
Handling / storage	Use rated slab-handling equipment and trained operators. Keep slabs secured upright on a suitable rack; protect edges and corners.
Daily cleaning	Use a soft cloth and a compatible pH-neutral cleaner. Rinse and dry; test unfamiliar cleaning products on a small inconspicuous area.
Surface protection	Use cutting boards and trivets. Avoid impact on exposed edges and do not stand or sit on unsupported sections.

Funtek | Shanghai Fengyou Industrial Co., Ltd.

Email: linda@funtekgroup.com | WhatsApp: [+86 189 1817 3725](tel:+8618918173725)

[View this product](#) / [Weight & packing calculator](#) / [Request a quotation](#)